

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>7</sup> : <b>G06F</b></p>	<p><b>A2</b></p>	<p>(11) International Publication Number: <b>WO 00/68759</b> (43) International Publication Date: 16 November 2000 (16.11.00)</p>
<p>(21) International Application Number: PCT/US00/12833 (22) International Filing Date: 9 May 2000 (09.05.00) (30) Priority Data: 60/133,782 12 May 1999 (12.05.99) US (71) Applicant: THE BOARD OF TRUSTEES OF THE LELAND STANFORD JUNIOR UNIVERSITY [US/US]; Suite 350, 900 Welch Road, Palo Alto, CA 94304-1850 (US). (72) Inventors: YEN, Samuel; 768 N. Rengstorff Avenue, Apt. 10, Mountain View, CA 94043 (US). FRUCHTER, Renate; 470 Los Pajaros, Los Altos, CA 94024 (US). LEIFER, Larry; 831 Esplanada Way, Stanford, CA 94305 (US). (74) Agent: ALBOSZTA, Marek; 426 Lowell Avenue, Palo Alto, CA 94301 (US).</p>		<p>(81) Designated States: AU, CA, JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>Without international search report and to be republished upon receipt of that report.</i></p>
<p>(54) Title: SYSTEM AND METHOD FOR INDEXING, ACCESSING AND RETRIEVING AUDIO/VIDEO WITH CONCURRENT SKETCH ACTIVITY</p> <div data-bbox="474 1220 1078 1717"></div> <p>(57) Abstract</p> <p>For a number of users is a system provided to create, edit, replay and view documents of free hand drawn sketches. The system captures the creation process together with verbal and/or visual information provided by each user and automatically correlates them for a later synchronized replay. The system provides a number of tools and features, mainly to: combine the sketching activity with existing images, to selectively retrieve media information correlated to individual sketch entities and to quasi simultaneously collaborate at a common document. The system architecture can be adjusted to various parameters in the communication infrastructure. The system may be implemented in any software program, a web based service, a web browser, an operating system for computers and/or communication devices.</p>		

*FOR THE PURPOSES OF INFORMATION ONLY*

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Larvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

5

10

15

**System and Method for Indexing, Accessing and Retrieving  
Audio/Video with Concurrent Sketch Activity**

20

**FIELD OF THE INVENTION**

The invention relates to the field of communication methods. In particular, the invention relates to software for identifying sketch entities from sketch activity and for correlating media  
25 information to these sketch entities.

**RELATED APPLICATION**

30 This application is a continuation of the U.S. provisional patent application No. 60/133,782 filed on 05/12/99, which is hereby incorporated by reference.

35

**BACKGROUND OF INVENTION**

Short-term communication between two or more distant people is typically performed on the audio level. A variety of telephone systems provide the proper tools for that type of communication.

5

To exchange more specific information, communication solely on the audio level becomes often unsatisfactory. Visual information in the form of graphics, pictures, sketches and the like are used to aid the information exchange.

10

In meetings, where people are physically together, visual information is shared by making it simultaneously visible to all participants. In addition, the participants are able to express themselves by using gestures or by drawing sketches.

15

Devices have been developed that provide shared visual information correlated to audio information. The goal of such devices is to enable people in distant locations, to communicate verbally and share visual information at the same time. The limited transmission capacity of public switched telephone networks (PSTN) reduces the feasibility of simultaneous audio and visual information exchange. The exchange of more detailed visual information like for instance pictures, graphics or sketches is not possible with such systems. Real time multi media communication devices (RTMMCD) that use the PSTN typically provide only a low resolution screen that is able to capture and transmit facial expression of a participant.

One major problem of multi media communication is the large variation in the data amount of the transmitted audio and visual information. These discrepancies occur because visual and verbal information are typically correlated in an information exchange event. As a result, high data amount of simultaneous audio and visual information intent to exceed the transmission capacities of the communication infrastructure. Since a signal distributed between a number of users via a PSTN can carry only a certain amount of information within a given time period, the transmission of visual and verbal information needs to be

5 buffered to allow the transmission of more sophisticated visual information.

The buffering of the information is typically accomplished by independently saving audio information and/or video information.  
10 This buffering is accomplished temporally and/or permanently, at the location where the information is created and/or at a remote location. In a following step, the correlated information are transmitted chronologically with certain user definable parameter.

15 U.S. Pat. No. 4,656,654 to Dumas discloses a computer-assisted graphic teleconferencing method and apparatus that is designed for use with the PSTN. The method and apparatus described in the patent work according to the principles described in the  
20 paragraph above. The main disadvantage of this invention is that graphics and voice can be communicated only alternately. A simultaneous distribution of a sketching activity with the contemporaneous explanatory verbal information is not possible with this invention. In addition, the invention is not usable  
25 in combination with the Internet since no distribution system is described that may be implemented in a web page.

U.S. Pat. No. 5,801,757 to Saulsbury discloses an interactive communication device that allows simultaneous sending and  
30 receiving of audio and graphic information via a PSTN. The device uses techniques for compression, merging and coding of signals to accomplish the transmission. The patented device further uses techniques for decompressing, separating and decoding of signals to recreate the audio and graphic signals in  
35 their original form at the location of a receiver. The patented device is placed between the telephone line and the PC.

The device provides a possibility for simultaneous exchange of audio and graphical information. The main shortcoming of the

5 device is that it needs to be physically installed in  
combination with a software program, which may result in  
problems of compatibility with existing hardware. Furthermore,  
it is not possible to communicate audio-graphically with a  
person that is not in possession of the device. The invention  
10 is also not usable in combination with the Internet since no  
distribution system is described that may be implemented in a  
web page.

U.S. Pat. No. 5,832,065 to Bannister et al. discloses a  
15 synchronous voice/data message system that allows the exchange  
of audio-graphic messages between specific portable  
communication devices also via a PSTN. The message system  
provides a replay function to display the creation process of  
the graphical information. In addition, the message system  
20 simultaneously replays the correlated verbal information. The  
chronological audio graphic information can be replayed at  
varying speeds. Unfortunately, the message system is one  
directional and chronological. It does not afford a recipient  
the option to selectively access segments of the chronologically  
25 retrieved message. It is not possible to communicate audio-  
graphically with a person that is not in possession of the  
portable communication device. Further, the invention is not  
usable in combination with the Internet since no distribution  
system is described that may be implemented in a web page.

30

US. Pat. No. 5,915,003 to Bremer et al. discloses a sketching  
unit for transmission of sketches and notes over normal  
telephone lines. The teaching of the patent is similar to that  
of Saulsbury. It utilizes in addition a specific sketching unit  
35 that allows creating and/or displaying graphic information. The  
patent further discloses a technique for a multiplexed  
transmission via a device that is switched between the telephone  
line and a computer. It is not possible to communicate audio-  
graphically with a person that is not in possession of the

5 device. The invention is also not usable in combination with the Internet since no distribution system is described that may be implemented in a web page.

10 A communication medium that is gaining more and more significance is the Internet. A number of software products and web pages provide users possibilities to exchange audio and/or graphical information for the purpose of real time collaboration.

15 For instance, the RealityWave Inc. discloses on their web page www.realitywave.com a software product called VizStream that allows to create 3D graphics that can be embedded within a web page and accessed by the client. Even though the software provides an enhanced display technique, it limits the client to  
20 view a prepared information. Bi-directional information exchange on the basis of a common document is not possible with that technique. Further, Vizstream provides only the display of 3D models without any additional medial information like for instance audio, video or graphics.

25 On the web page www.solidworks.com a software program called "eDrawing" is presented, which allows to generate self extracting files that can be attached to emails. The self extracting files unfold into an interactive screen where 2D  
30 mechanical drawings can be viewed together with remarks and any other text or graphical information necessary to make the drawing understandable. eDrawing is also one-directional, which means that the client cannot add on his side to the contents of the information. Further, eDrawing provides no possibility to  
35 add verbal information to the drawing.

On the web page www.bluelineonline.com web site based service programs are introduced by the names of "ProjectNet", "ProjectNet LT" and "ProjectNet EPS". Among other services, the

5 programs provide a number of clients engaged into the same  
project with the possibility to review simultaneously technical  
drawings. In addition, the programs enable the clients to add  
predetermined graphical symbols and explanatory text to the  
drawing. This added information is distributed to all other  
10 clients for the purpose of review.

Even though the programs greatly improve real time collaboration  
they restrict the clients to the use of predetermined graphical  
symbols together with written text. Sophisticated information  
15 elements within a single displayed image and/or in a  
chronological context cannot be captured directly by the  
programs. In addition, the information is restricted to visual  
information that need to be manually added. No possibility to  
incorporate audio information is provided.

20 Therefore, there exists a need for a method and system to allow  
two or more person to communicate audio graphically without  
significant time delay, without the need for specific equipment  
and without limitations imposed by the transmission capacity of  
25 the available communication infrastructure. The present  
invention addresses this need.

#### OBJECTS AND ADVANTAGES

30 It is a primary object of the present invention to provide a  
method that allows a number of clients to freely document  
graphical information together with multi medial information  
like, for instance, audio and/or video information.

35 It is a further object of the present invention to provide a  
method that captures the correlation between graphical and other  
multi medial information for a chronological presentation at  
client locations.



5

It is another object of the present invention to provide a method that presents the captured graphical information and the correlated multi medial information in a mode such that the client can select any graphical information element individually; by making the selection, the software should simultaneously replay the correlated multi medial information element.

It is another object of the present invention to provide a method that allows to essentially simultaneously exchange information added to a graphical and multi medial document between a number of clients.

In addition, it is an object of the present invention to provide a method that keeps a number of graphical and multi medial documents independently available for review and modification by a number of clients.

Finally, it is an object of the present invention to provide the method in a form that allows it to be accessed by a number of clients via the internet and/or internet related services like for instance emailing.

30

#### SUMMARY

The present invention introduces a software program that allows clients to exchange graphical information together with correlated multi medial information. Correlated multi medial information is primary verbal information and secondary video information.

The software program provides the exchange in a quasi simultaneous mode. Since real time information exchange is

5 influenced by the transmission capacity of the communication infrastructure the software program provides a script log for each client and project. In the script log all events during the creation of a graphical and multi medial document are temporally correlabel. Further, the software program recognizes  
10 free created graphical entities by capturing the activities of input devices. An input device is, for instance, a mouse, a digitizer tablet or a pointer of a touch screen.

The creation of a graphical entity begins typically with an  
15 initiation event performed by the user. This initiation event is performed with the down click of a mouse button or by bringing a pointer into contact with a touch screen. The creation of a graphical entity ends typically with an termination event performed by the user. This termination event  
20 is performed, for instance, with the release of the down held mouse button. The period between the initiation event and the termination event define the temporal boundary condition to combine a number of drawn line segments into a sketch entity. This definition system is applied in a basic and an advanced  
25 form with the result of sketch entities with varying complexities.

A video input device as for instance a video camera may capture in addition visual information correlated to the graphical  
30 information. The visual information is primarily provided by the user and may, for instance, be the facial expressions and gestures of the user or any other visual information correlated to the creation of the graphical information.

35 An audio input device as, for instance, a microphone captures audio information correlated to the graphical information. The audio information is primarily provided by the user in the form of verbal information.

5 Graphical, visual and audio information are time stamped,  
captured and stored. In the preferred embodiment of the  
invention, the storing is performed in the form of a dynamic  
script log on a direct-access storing medium like, for instance,  
a disk drive or the read active memory (RAM) of the users  
10 computer. As a result, the correlation of graphical, visual and  
audio information can be reconstructed.

Since verbal information is not necessarily synchronous with the  
period of each correlated initiation action, the invention  
15 recognizes bulks of audio information and correlates them to the  
corresponding sketch entities.

The Internet allows each individual user to retrieve and  
transmit information independent of the capacity of the  
20 communication infrastructure. In such a buffered transmission  
mode, the transmission capacity of the communication  
infrastructure solely influences the waiting time to send and/or  
retrieve the information. In correspondence with this buffered  
transmission mode, the present invention provides a buffered  
25 transmission mode, during which the created script log is  
transmitted to a central server and eventually broadcasted in a  
quasi real time mode that corresponds to the transmission  
capacity of the communication infrastructure.

30 The Internet also allows streaming information transmission  
during which the information is presented as it is received  
and/or created. Streaming transmission is utilized for instance  
for so-called chat rooms or streaming video. With increasing  
transmission capacity of the communication infrastructure, on  
35 which the Internet is based, streaming data transmission via the  
Internet becomes increasingly relevant. The present invention  
provides a streaming transmission mode, during which data is  
distributed between the number of participants as it is created.

- 5 The preferred system architecture of the present invention consists of one or more main server stations that can be accessed by the clients via a web page. Such a web page operates as a broadcasting site that receives and redistributes all information from the individual clients and/or participants.
- 10 The web page provides an interactive graphical interface, in which the clients can replay, view, edit and/or create sketch information.

During the replay mode the creation process of a document can be

15 replayed on the interactive graphical interface in a real time mode and/or in a temporally altered mode. Correlated audio and/or video information is replayed simultaneously.

During the viewing mode, individual sketch entities can be

20 selected and the correlated audio and/or video information is replayed. Since sketch entities do not necessarily have media information associated with them, the invention provides an optional highlight mode. The highlight mode allows the reviewing client to visually recognize additional media

25 information correlated to individual sketch entities.

During the editing mode, the client can add sketch information to a retrieved document. At the same time, the client can record audio and/or video information to contribute to

30 collaborative creation of a document. The invention provides a selectable graphical vocabulary like, for instance, line fonts or colors that can be assigned to individual clients. As a result, each contribution can be correlated to its creator. The invention provides the possibility to either broadcast the

35 collaborative editing in a quasi real time mode respectively a streamed real time mode and/or an off-time mode. During the off-time mode, individual participants may contribute at any time to the creation of the document. The invention provides

5    thereby an information system that informs other participants  
about an update of a document under collaboration.

10   In addition, the interactive graphical interface a background  
display mode, during which graphical and/or pictographic images  
may be displayed. In doing so, clients are able to incorporate  
previously created documents like, for instance, blueprints,  
photographs, maps, snapshots and/or video frames.

15   In an alternate embodiment, a client may be provided with a  
software program of the present invention in the form of a self-  
extracting email message, and/or an installable program  
downloaded from a web page. The installable program may also be  
retrieved from a storage medium like, for instance, a Floppy  
Disk or a Compact Disk. As a result, the client is able to  
20   perform all operations of the present invention on his/her own  
computer without being connected to the Internet. In this  
embodiment, each client occasionally exchanges information  
either with a server station or directly with other clients to  
exchange all updates.

25   The present invention may further be part of an operating system  
that operates a computer and/or a communication device like, for  
instance, a cellular phone. The operating system may include  
the operation of a communication network.

30   The system architecture may be centralistic and/or equalized.  
In a centralistic system architecture a central server stores  
centrally the creations and activities of each individual client  
in a central log. In an equalized system architecture, each  
35   client stores the creations and activities of his/her own and  
other clients in a personal log. The clients personal log is  
updated during an update call to a central server performed  
during an update ring call to other clients. Update calls and  
update ring calls may be triggered by the client or

5 automatically dependent on an available transmission capacity,  
or other definable parameters.

10 The invention and in particular the alternate embodiment may be  
applied to any communication system and particularly to a  
wireless communication system with inconsistent transmission  
capacities and arbitrary interruptions of connections.

## 15 BRIEF DESCRIPTION OF THE FIGURES

**Fig. 1** shows an example of a basic sketch entity with a single  
initiation event and a single termination event.

20 **Fig. 2** shows an example of an advanced sketch entity with  
multiple initiation events and multiple termination events.

**Fig. 3** shows an exemplary graph of a basic procedure to capture  
sketching activities and correlated media information.

25 **Fig. 4** shows an exemplary graph of an advanced procedure to  
capture sketching activities and correlated media information.

**Fig. 5** shows a simplified example of a interactive graphical  
30 interface with sketch entities that are marked and correlated to  
client identities.

**Fig. 6** shows a simplified example of a interactive graphical  
interface with sketch entities that are marked to visualize the  
35 availability of correlated multi-media information.

**Fig. 7** shows a simplified example of a interactive graphical  
interface with sketch entities that are marked to visualize the  
chronological creation process of the sketch entities.

5

Fig. 8 shows the simplified system architecture for a centralistic distribution system.

10

Fig. 9 shows the simplified system architecture for an equalized distribution system.

#### DETAILED DESCRIPTION

15 Although the following detailed description contains many specifics for the purposes of illustration, anyone of ordinary skill in the art will appreciate that many variations and alterations to the following details are within the scope of the invention. Accordingly, the following preferred embodiment of  
20 the invention is set forth without any loss of generality to, and without imposing limitations upon, the claimed invention.

In the present invention, a interactive graphical interface 52 (see Figs. 5-7) is provided to a number of clients. The  
25 interactive graphical interface 52 allows clients C1-N, C2-N (see Figs. 8, 9) to create freehand drawn sketch entities. The drawing process is captured in a real time manner such that simultaneously captured multi-media information can be precisely correlated.

30 For example, the sketch entity is a curve 2 (see Figs. 1, 2) represented by a number of connected line segments 3 (see Figs. 1, 2). In the simplest case, the sketch entity consists of one curve 2. Fig. 1 shows an example of such a basic sketch entity.

35 || The real time capture of the sketch entity's creation process requires the utilization of time stamps Tst11-1N, Tst21-2N (see Figs. 3, 4). Time stamps Tst11-1N, Tst21-2N have a clock frequency Clf (see Fig. 3) that may be defined: either by the clients operating system, or it may be a parameter that is ||

5 uniformly defined for all clients. The clock frequency **Clf** is processed as a function of a computers internal clock and is preferably constant.

10 The creation process of the sketch entity commences with the initiation event **IE10-N, IE20-N** (see **Figs. 3, 4**). The initiation event **IE10-N, IE20-N** is, for instance, the down click of a mouse button at the time, when the cursor is within the drawing area **51** (see **Figs. 5-7**) of the interactive graphical interface **50**. Dependent on the hardware that is used to create  
15 the drawing, the initiation event **IE10-N, IE20-N** may also be the contacting of a drawing pin with the surface of a touch screen or an activation click of a specified button of a digitizer board. In other words, the initiation event **IE10-N, IE20-N** may be any interaction of the client with any kind of input device  
20 that is feasible to recognize a predetermined initiation command. This applies also to a voice recognition system that is utilized to recognize verbal commands as a means to initiate predetermined functions of the present invention. The voice recognition system may be incorporated in the system of the  
25 present invention or may be an independent system incorporated in the client's computer.

In correspondence with the initiation event **IE10-N, IE20-N** the drawing of the curve **2** is initiated at the initiation point **4**.  
30 The client's drawing movement is captured in sequences that correspond to the clock frequency **Clf** of the time stamps **Tst11-1N, Tst21-2N**. As a result, a progressive number of points **6** are created within the drawing area **51**. The points **6** are connected by line segments **3**.

35

The creation of the sketch entity is finished, when the client initiates the termination event **TE10-N, TE20-N** (see **Figs. 3, 4**). The termination event **TE10-N, TE20-N** is, for instance, the release of a pressed mouse button. Dependent on the used



5 hardware, the termination event **TE10-N**, **TE20-N** may also be the  
removal of a contacting drawing pin from the surface of a touch  
screen or a termination click of a specified button of a  
digitizer board. In other words, the termination event **TE10-N**,  
**TE20-N** may be any interaction of the client with any kind of  
10 input device that is feasible to recognize a predetermined  
termination command. This applies also to a voice recognition  
system that is utilized to recognize verbal commands as a means  
to initiate predetermined functions of the present invention.  
The voice recognition system may be incorporated in the system  
15 of the present invention or may be an independent system  
incorporated in the client's computer.

After the curve 2 has been created, the system analyzes the  
numeric values of the coordinates of points 6. During this  
20 analysis, the extreme values of the x and y coordinates are  
recognized. These extreme values are utilized by the system to  
create a boundary rectangle 1. The boundary rectangle 1 is  
defined to serve as a dummy object, which is utilized during the  
editing, viewing and replaying mode of the invention.

25 The clock frequency **Clf** defines in combination with the drawing  
speed the resolution of the curve 2. In other words, the faster  
the drawing speed for a given clock frequency **Clf** the longer the  
distance between individual points 6. The clock frequency **Clf**  
30 is adjusted to a feasible level that balances the average  
drawing speed at which clients create the sketch entities with a  
minimal required curve resolution.

A basic sketch entity is created as an independent element of a  
35 more complex free hand drawing and/or to encircle or underline a  
feature of a background image that is displayed by the system in  
the viewable area 51.

5 Fig. 2 shows an example of an advanced sketch entity. The system provides the possibility to create advanced sketch entities that consist of a number of combined curves 22a-d. Freehand drawings are typically created with a certain inaccuracy. To allow an automated combining of inaccurately  
10 drawn curves 22a-d, the system of the present invention assigns proximity areas 26a-d to the points 6. The proximity areas 26a-d are predetermined areas surrounding the points 6. The areal extension of the proximity areas 26a-d may be defined in a vector format or a coordinate format.

15

Proximity areas 26a-d are recognized in correlation to the curves 22a-d. As a result, proximity areas 26a-d that overlap with each other and do not belong to the same of the curves 22a-d trigger an automated combining of the correlated curves 22a-d.  
20 The size of the proximity areas 26a-d is defined in correlation to the maximal space between the points 6 such that a closed area in the vicinity of the curves 22a-d is covered by the proximity areas 26a-d.

25 The combining function may be activated as part of the system setup and/or individually by assigning the initiation event IE10-N, IE20-N to two separate initiation commands. In case of a mouse this may be, for instance, the down click of the right mouse button for the initiation event IE10-N, IE20-N with  
30 combining function and the down click of the left mouse button for the initiation event IE10-N, IE20-N without combining function.

It is noted that the dual assignment of initiation commands for  
35 the initiation event IE10-N, IE20-N may be applied to any other input device, including a voice recognition system.

- 5 The boundary rectangles 21a-d may be combined to the combined boundary rectangle 21e and/or remain as independent dummy objects.

10 The system may further provide automated geometric feature recognition to correlate standardized geometric elements to the freehand drawn curves. During the creation of complex freehand drawings, which consist of a number of basic and/or advanced sketch entities it is desirable to replace inaccurate geometric elements with computer generated accurate geometric elements.

15 These computer generated accurate geometric elements may for instance be:

- 1) a straight line replacing the curves 2, 22a-d within a predetermined maximal curvature;
- 2) a horizontal line replacing the curves 2, 22a-d within a  
20 predetermined maximal aberration, deviating in y-direction relative to the initiation point 4;
- 3) a vertical line replacing the curves 2, 22a-d within a predetermined maximal aberration, deviating in x-direction relative to the initiation point 4;
- 25 3) an arc replacing the curves 2, 22a-d within a predetermined maximal curvature aberration over its length.

It is noted that the automated geometric feature recognition may be extended to recognize any free hand drawn geometric form and replace it with computer generated accurate geometric elements.

30

The automated feature recognition may be activated during the setup of the system or it may be independently activated with a feature recognition command. The feature recognition command can be incorporated, for instance as the handling variation of  
35 the input device. In case of a mouse as the input device, the handling variation may be a single down click for an initiation command without feature recognition and a double click for an initiation command including feature recognition.

5 During the creation of basic and/or advanced sketch entities, additional multi-media information may be captured. **Fig. 3** is shown to explain the basic procedure of capturing sketching activities and correlated media information. The combined graph shows in its top section a video signal **Vi**, in its middle  
10 section the audio signals **A10-N** and in the bottom section the sketch activity curves **Sk10-N**.

The top vertical axis **V** corresponds to the signal density of the video signal **Vi**, the middle vertical axis **A** corresponds to the  
15 acoustic level of the audio signals **A10-N**, and the bottom vertical axis **SK** corresponds to the drawing path during the creation of the curves **2, 22a-d**. Hence, the incline angle of the sketch activity curves **Sk10-N** corresponds to the drawing speed at which curves **2, 22a-d** are created. The horizontal axis  
20 of the top, middle and bottom section represent the elapsed time.

The vertical raster lines that cover the top, middle and bottom section represent the time stamps **Tst11-1N**. The spacing between  
25 the vertical raster lines represent the clock frequency **Clf**.

During the creation process of the basic and/or advanced sketch entities the invention utilizes eventual computer features to record audio and video information. A conventional computer has  
30 hardware components like, for instance, a microphone and a sound card to capture and process audio information respectively a camera and a video card to capture and process video information. In combination with these hardware components, a computer is typically equipped with an operating system that is  
35 able to process and embed this audio and video information in application systems like the one of the present invention. Thus, a client, owning a conventional computer, needs only to perform an access procedure in order to utilize the system of the present invention.

5

An access procedure may be, for instance:

- 1) the access of a specific web page;
- 2) the down loading and extraction of an email message;
- 3) the activation of an operating system feature;
- 10 4) the down loading, extraction and/or execution of an email attachment; and/or
- 5) the installation of a software program from a tangible data storage medium like, for instance a Floppy Disk or a Compact Disk, and consequently activation of the installed
- 15 software program.

To recognize later on the correlation of audio, video and sketching activities, the system assigns the time stamps **Tst11-1N** during the creation and/or editing mode simultaneously to the

20 sketching activities and to the captured audio and video. Audio and video are continuously captured during the creation and/or editing mode. The audio signals **A10-N** are typically interrupted by silence periods **AS**. The audio signals **A10-N** represent preferably verbal information provided by the clients. Silence

25 periods **AS** typically separate blocks of coherent verbal information.

The video signal **Vi** is typically a consistent stream of video data that corresponds in size and structure to the image

30 resolution, the color mode, the compression ratio and the frames per time unit. The video signal may be a sequence of still images at a rate that the still images are recognized as still images or that they combine in a viewers mind to a continuous flow.

35

During the replay mode a selected document is replayed such that the individual sketch entities are automatically recreated in the drawing area **51**. The automatic recreation is performed in a chronological manner. The audio signals **A10-N** and video signal

5 **Vi** are replayed synchronously together with the recreation of the individual sketch entities.

During the viewing mode a selected document is displayed with all sketch entities. By performing a selection process, the client selects one or more individual sketch entities. A replay initiation routine analyzes all time stamps **Tst11-1N** correlated to the selected sketch entities and determines the earliest one. The earliest detected of the time stamps **Tst11-1N** is taken by the system to define a common starting moment for the video signal **Vi** and for the audio signals **A10-N** respectively the silence periods **AS**. Audio and Video continue until the next selection of one or more sketch entities is performed by the client. At that moment, the replay initiation routine is initiated again.

20

The selection process is defined by the system in the preferred form of a selection rectangle. The selection rectangle has to be created by the client by indicating two diagonal selection points within the drawing area **51**. The selection rectangle selects the sketch entities by surrounding and/or intersecting with their correlated dummy objects.

25

In an alternate embodiment, the selection process is performed by initiating a selection command when the cursor is placed by the client within one of the proximity areas **26a-d**. By doing so, the client is able to distinctively select singular sketch entities. The alternate embodiment is applied in cases of high densities of individual sketch entities within the drawing area **51**.

35

To provide the client with confined media information correlated to one or more selected sketch entities, the system provides an advanced procedure to capture sketching activities and

5 correlated media information. Fig. 4 is shown to explain the advanced procedure.

Fig. 4 corresponds with its elements mainly to those of Fig. 3. The audio signals **A20-N** are comparable to the signals **A10-N**, the  
10 sketch activity curves **Sk20-N** are comparable to the sketch activity curves **Sk10-N**. In addition to Fig. 3, Fig. 4 introduces a audio switching level shown in the middle section with the horizontal line **S1**.

15 Block elements of media information are provided during the advanced procedure by recognizing only audio signals **A20-N** that are at a level above the switching level. During the creation of sketch entities the system captures audio signals **A20-N** between the audio initiation moments **AI1-N** and the audio  
20 termination moments **AT1-N**. The audio initiation moments **AI1-N** and the audio termination moments **AT1-N** share preferably the same switching level. It is noted that the invention applies also to the case, when the audio initiation moments **AI1-N** and the audio termination moments **AT1-N** are triggered at different  
25 switching levels.

In an audio assigning procedure, the system assigns the audio initiation moments **AI1-N** and the audio termination moments **AT1-N** to the closest of the time stamps **Tst21-2N**. These times stamps  
30 **Tst21-2N** are utilized to cut the corresponding video sequences **V20-N** out of the video signal **Vi** and to assign them to the correlated audio signals **A20-N**.

The creation of sketch entities takes place during the advanced  
35 procedure as it is described for the basic procedure.

After the multi-media blocks have been created by the system, a block assigning procedure is performed to assign the multi-media

- 5 blocks to the correlated sketch entity dependent on their time relation. Time relations are, for instance:
- 1) the sketch entity fully overlapping a multi-media block;
  - 2) the multi-media block fully overlapping a sketch entity;
  - 3) the initiation event **IE20** following the audio initiation moment **AI1** and the termination event **TE20** following the audio termination moment **AT1**;
  - 4) the audio initiation moment **AI3** following the initiation event **IE22** and the audio termination moment **AT3** following the termination event **TE22**;
  - 5) the initiation event **IE24**, **IE2N** and/or the termination event **TE24**, **T2N** being below a minimal time span respectively below a minimal number of time stamps to the audio initiation moment **AIN** and/or the audio termination moment **ATN**.

20

The audio assigning procedure and the block assigning procedure may be performed with an approximation algorithm provided by the system either simultaneously at the time the creation mode respectively the editing mode is activated, or after the creation mode respectively the editing mode is terminated.

25

During the viewing mode, the advanced procedure allows the client to selectively witness the multi-media blocks that is correlated to the selected sketch entity. The system provides the client with an optional predetermined audio and/or video signature to inform him/her at the end of the correlated multi-media block. Hence, the advanced procedure prevents the client from accidentally witnessing multi-media information that does not relate to the selected sketch entity.

30

To provide the client with additional administrative information, the system optionally displays the individual sketch elements in varying styles. The administrative information is, for instance:



- 1) client identification correlated to individual sketch entities of a collaboratively created document;
- 2) information about available multi-media blocks for individual sketch entities contained in a document;
- 3) chronological creation of the sketch entities contained in a document.

**Figs. 5, 6 and 7** show in that respect a simplified example of the interactive graphical interface **52** provided by the system together with examples of graphical coding of sketch entities according to the above listing.

In **Fig. 5** the sketch entities **53, 54, 55** are shown with first graphical codes to mark them according to their creators client identification. In the example of **Fig. 5**, the graphical codes are varying line fonts. Graphical codes may be of any color, shape, symbolic contents and/or dynamic respectively static luminescence variations. In an optional first window **56**, a collaborating client list **57** is displayed together with the assigned graphical codes.

In **Fig. 6** the sketch entities **63 and 64** are shown with second graphical codes to mark them in case multi-media blocks are available. In the example of **Fig. 6**, the graphical codes are varying line fonts. Graphical codes may be of any color, shape, symbolic contents and/or dynamic respectively static luminescence variations. In an optional second window **66**, a nomenclature **67** is displayed together with the assigned graphical codes. The second graphical codes may also be applied during the viewing mode to dynamically high light the sketch entity, whose multi-media block is replayed.

In **Fig. 7** the sketch entities **73-76** are shown with third graphical codes to mark them according to their creation chronology. In the example of **Fig. 7**, the graphical codes are varying line fonts. Graphical codes may be of any color, shape,

5 symbolic contents and/or dynamic respectively static  
luminescence variations. In an optional third window 78, a  
nomenclature 77 of the sketch entities is displayed together  
with the chronologically applied third graphical codes. The  
third graphical codes may be preferably designed with a fluent  
10 transition such that the chronology of the creation process can  
be easily recognized. Fluent transitions are, for instance:

- 1) the graduate change in the colors corresponding to the  
color spectrum;
- 2) the continuous dilution of dotted lines.

15

The system provides a variety of background images that may be  
displayed in the display area 51. Background images are  
preferably pictographic images like, for instance:

- 1) photographs;
- 20 2) scans of graphics and/or blueprints;
- 3) scans of text;
- 4) snapshots of videos.

It is noted that the system may also include background images  
in vector format as they are known to those skilled in the art  
25 for CAD drawings.

Background images may be imported at the beginning and/or at any  
time during the creation of a new document or under laid behind  
an existing creation of sketch entities.

30

In an alternate embodiment, the system utilizes the computers  
video capturing capability to retrieve snapshots of the  
displayed video and to provide the snapshots as background  
images. The snapshot retrieval function is preferably activated  
35 during the creation mode. The snapshot is taken by the client  
C1-N, C2-N by performing a snapshot capturing command, which is  
simultaneously performed during the real time display of the  
displayed video. A snapshot capturing command may for instance

5 be a mouse click at the moment the cursor is placed within the video display screen **59A**.

The snapshot retrieval function allows the client **C1-N**, **C2-N** to comment in a quasi simultaneous way a captured video. Hence,  
10 the snapshot retrieval function is particular feasible to combine a live visual experience with a documentation procedure. Applications for the snapshot retrieval function are, for instance, inspection of construction sites.

15 **Fig. 5-7** further show the optional video display screen **59A** and the optional audio control screen **59B**. Video display screen **59A** and the audio control screen **59B** are conventionally provided by the operating system and may be controlled by the system of the present invention. It is noted that the video display screen  
20 **59A** and/or the audio control screen **59B** may be provided by the system of the present invention.

The video display screen **59A** displays, for instance:

- 25 1) the video information as it is recognized by the computers camera;
- 2) the video signal **Vi** as it is captured during the creation mode;
- 3) the video signal **Vi** during a continuous replay;
- 4) the video signal **Vi** during the replay of a selected multi-  
30 media block;
- 5) the snapshot retrieved with the snapshot retrieval function.

The audio control screen **59B** performs functions, as they are  
35 commonly known to control the recording and replay of audio data on a computer. The audio control screen **59B** is typically provided by the operating system and may be controlled by the system of the present invention.

5 The system provides a number of standardized commandos to perform tasks like, for instance, opening, printing, viewing and scrolling a document. The standardized commandos are commonly known for computer programs.

10 **Fig. 8** and **9** show two different system architectures for the present invention. **Fig. 8** shows the preferred embodiment of a centralistic system architecture incorporated in a web page distribution system. A server **S1** operates a web page, which is accessible by a number of clients **C11-1N**.

15

After the client **C111** has performed an identification routine, the client **C111** is able to access the interactive graphical interface **52**. A processing program that provides the creating, editing, replay and viewing modes becomes available.

20

The processing program enables the computer **Co11** to create and store the script logs **Sc11-N**. The script logs **Sc11-N** contain all data gathered during the creation mode respectively during the editing mode. The computer **Co11** is in bi-directional communication with the server **S1**, which stores the script log **Sc11** in a permanent log **P1**.

25

The permanent log **P1** is the computer readable representation of the creation process of a document. It is continuously updated with all scrip logs **Sc11-Sc1N** that are created on the computers **Co11-Co1N**. A database **Db10** maintained by the server **S1** stores the permanent logs **P1** of a number of documents created and edited by the clients **C11-C11N**. Hence, the server **S1** is the central storing and redistribution site for all documents.

30

35

In case, a client **C1** wants to retrieve a document for the purpose of viewing or editing, he/she initiates a retrieval request command. The retrieval request command prompts the interactive graphical interface **52** to provide the client **C11**

5 access the database **Db10**. After making a selection, the requested document is transmitted in the form of the permanent log **P1** to the computer **Co11** and becomes accessible for replay, editing and viewing. All changes are documented in an additional script log **Sc111-Sc1N** that is sent back to the server  
10 **S1**, where the newly created script log **Sc111-Sc1N** is added to the already existing permanent log.

Erasing activity may be captured as a regular part of the creation process and/or removed from the script log and the  
15 permanent log during the editing mode. The creation mode further provides a rewind function to allow the user to rewind and erase the captured creation process up to a chosen moment and to start over again.

20 The script logs **Sc111-Sc1N** may be transmitted to the server **S1** continuously during the creation mode respectively during the editing mode and/or after these modes are ended.

The centralistic system architecture may be applied to any form  
25 of network wherein the clients **C11-C11N** can logon at any time to the server **S1**. Further, the centralistic system architecture may consist out of a number of servers **S1** that compare and update the context of their database **Db10** independently of the operation of the computers **C11-C1N**.

30 In an alternate embodiment, the system operates with an equalized system architecture as shown in **Fig. 9**. In the case of the equalized system architecture, each of a number of clients **C21-C2N** operates independently a computer **Co21-Co2N**,  
35 which maintains independently a database **Db21-Db2N**. The databases **Db21-Db2N** are stored on a first direct access storage device (FDASD). The databases **Db21-Db2N** contain a number of permanent logs **P121-P12N**, which are created, accessed, edited and maintained as described under **Fig. 8**. The processing

- 5 program that provides the interactive graphical interface 52 and the functional operation of the system, as described above, is permanently stored on a second direct access storing device (SDASD) of the computers **Co21-Co2N**.
- 10 The storage medium of the SDASD and/or the FDASD may be a removable storage medium like, for instance, a CD or it may be incorporated in the computers **Co21-Co2N** as it is the case, for instance, in a hard disk drive.
- 15 Whenever a client **C21** establishes a communication connection to another client **C22-C2N**, the clocks of each client **C21-C2N** are verified for synchronicity and eventual synchronized. Then, the databases **Db21-Db2N** are automatically compared and updated by the system. The equalized system architecture allows the clients
- 20 **C21-C2N** to operate the system independently of an available communication connection. Hence, the equalized system architecture is particularly feasible in combination with wireless communication systems.
- 25 The centralistic and the equalized system architecture may be combined temporarily or in any other feasible scheme to combine the specifics of each system architecture.

The centralistic system architecture and the equalized system

30 architecture provide two communication modes:

- 1) a time independent communication mode;
- 2) a quasi real time communication mode.

A time independent communication mode is favorably utilized in combination with the equalized system architecture, whereas the

35 quasi real time communication mode is favorably utilized in combination with the centralistic system architecture.

During the time independent communication mode each of the clients **C11-C1N**, **C21-C2N** works at a document at any time. The

- 5 script logs **Sc111-Sc11N**, **Sc121-Sc12N** are correspondingly created at any time. Hence, the system performs a low level script log distribution management during the time independent communication mode.
- 10 During the quasi real time communication mode the system has to perform a high level script log distribution management to reduce time delays in the distribution process between the clients **C11-C1N**, **C21-C2N**. During the high level script log distribution management the system performs an automated ranking
- 15 of data priorities. Data with low priority respectively less significance for a quasi real time collaboration is transmitted after high priority data has been transmitted.

The system keeps track of various operating parameters that are necessary to operate under the conditions described above.

20 These operating parameters are known to those skilled in the art. Operating parameters include, for instance, user identification, file conversion, application version.

- 25 The functional components of the inventive system are written in a computer readable code. Various software development systems provide the tools to create the computer readable code of the inventive system in accordance to the possibilities and needs of the used operating system. The code may be written, for
- 30 instance, in the commonly known computer language Java. To facilitate the encoding and distribution of the present invention under a Windows operating system, an exemplary development system may, for instance, be Netshow.

- 35 The databases **Db10**, **Db21-Db2N** and/or the processing program may be installable on the computers **Co11-Co1N**, **Co21-Co2N** in the form of:

1) a downloadable file accessible via a web page;

- 5        2) a self extracting file attached or part of an email  
         message;
- 3) incorporated in a web browser;
- 4) incorporated in an operating system;
- 5) a computer readable file stored on a tangible medium like  
10        for instance a Compact Disk.

Accordingly, the scope of the invention should be determined by  
the following claims and their legal equivalents:



5 What is claimed is:

1) A system for identifying sketch entities from captured sketching activity and correlating said sketch entities with media information, said media information being simultaneously captured with said sketching activity, said system comprising:

a) a drawing recognition means for capturing drawing movements of said sketching activity;

b) an input recognition means for capturing initiation events and termination events of said sketching activity;

c) a time stamping means for time stamping said sketching activity and said media information; and

d) a processing means for said identifying of said sketch entities.

2) The system of claim 1, wherein said system further comprises:

a) a database storing a number of permanent logs;

b) a program code providing:

I) said drawing recognition means;

II) said input recognition means;

III) said time stamping means;

IV) said processing means;

V) an interactive graphical interface;

VI) a creating mode;

VII) an editing mode;

VIII) a replay mode;

IX) a viewing mode;

X) a script log for storing all data of a document created on one of a number of user units;

- 5 XI) an audio level recognition means for  
recognizing an audio initiation moment and an  
audio termination moment;
- XII) a processing means for said identifying of  
said sketch entities and of said media blocks;  
10 and
- c) a distribution system for distributing said permanent  
logs and said script logs between said database and  
said number of user units.
- 15 3) The system of claim 2, wherein at least one of said  
number of user units is a computer.
- 4) The system of claim 2, wherein at least one of said  
number of user units is a communication device.
- 20 5) The system of claim 4, wherein said communication  
device is a wireless communication device.
- 6) The system of claim 2, wherein said system further  
25 comprises a server.
- 7) The system of claim 6, wherein said database is  
maintained by said server.
- 30 8) The system of claim 2, wherein said media information  
contains an audio-signal.
- 9) The system of claim 2, wherein said media information  
contains a video-signal.
- 35 10) The system of claim 2, wherein at least one of  
said sketch entities is started with one of said  
initiation events and is ended with one of said  
termination events.

5

11) The system of claim 10, wherein at least one of said initiation events defines a replay starting moment of said media information.

10

12) The system of claim 10, wherein at least one of said initiation events is in block correlation to said audio initiation moment and at least one of said termination events is in block correlation to said audio termination moment of said media block, wherein said audio initiation moment is in level correlation to a first noise switching level, and wherein said audio termination moment is in level correlation to a second noise switching level.

15

20

13) The system of claim 12, wherein said block correlation and said level correlation is processed by an approximation algorithm.

25

14) The system of claim 2, wherein said script log contains a creating history of said document created on one of said number of user units.

30

15) The system of claim 2, wherein at least one of said number of permanent logs contains said creating history of one or more of said number of user units.

35

16) The system of claim 2, wherein said script log contains an editing history of said document, said document being edited on one of said number of user units.

17) The system of claim 2, wherein said distribution system is a centralistic distribution system.

- 5           18) The system of claim 16, wherein said centralistic distribution system is based on a web page.
- 19) The system of claim 18, wherein said program code is provided on at least one of said user units via said web page.
- 10           20) The system of claim 2, wherein said program code is part of a web browser.
- 21) The system of claim 2, wherein said program code is part of an operating system, said operating system operating at least one of said user units.
- 15           22) The system of claim 2, wherein said program code is a self extracting file transmitted to at least one of said user units.
- 20           23) The system of claim 22, wherein said self extracting file is in an email attachment.
- 24) The system of claim 2, wherein said program code is stored in the form of a computer readable code on a direct access storage device of at least one of said user units.
- 25           25) The system of claim 2, wherein said program code further provides a background image on said interactive graphical interface.
- 26) The system of claim 25, wherein said background image is a snapshot derived from said video signal.
- 30           27) The system of claim 2, wherein said distribution system is an equalized distribution system, wherein

5           said database is stored in form of multiple representations on a number of direct access storage devices of a number of said user units.

1/5

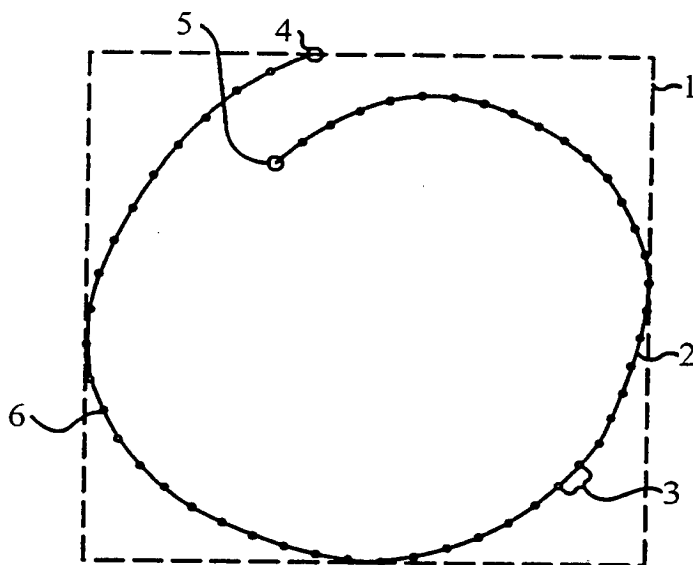


Fig. 1

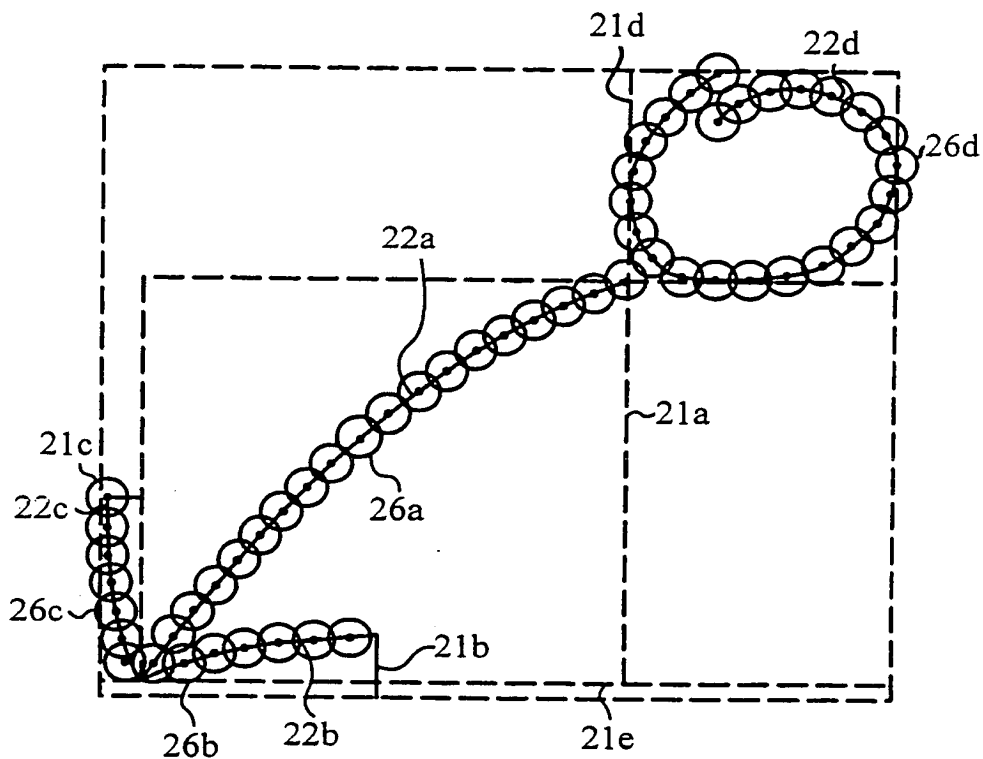


Fig. 2

BEST AVAILABLE COPY

2/5

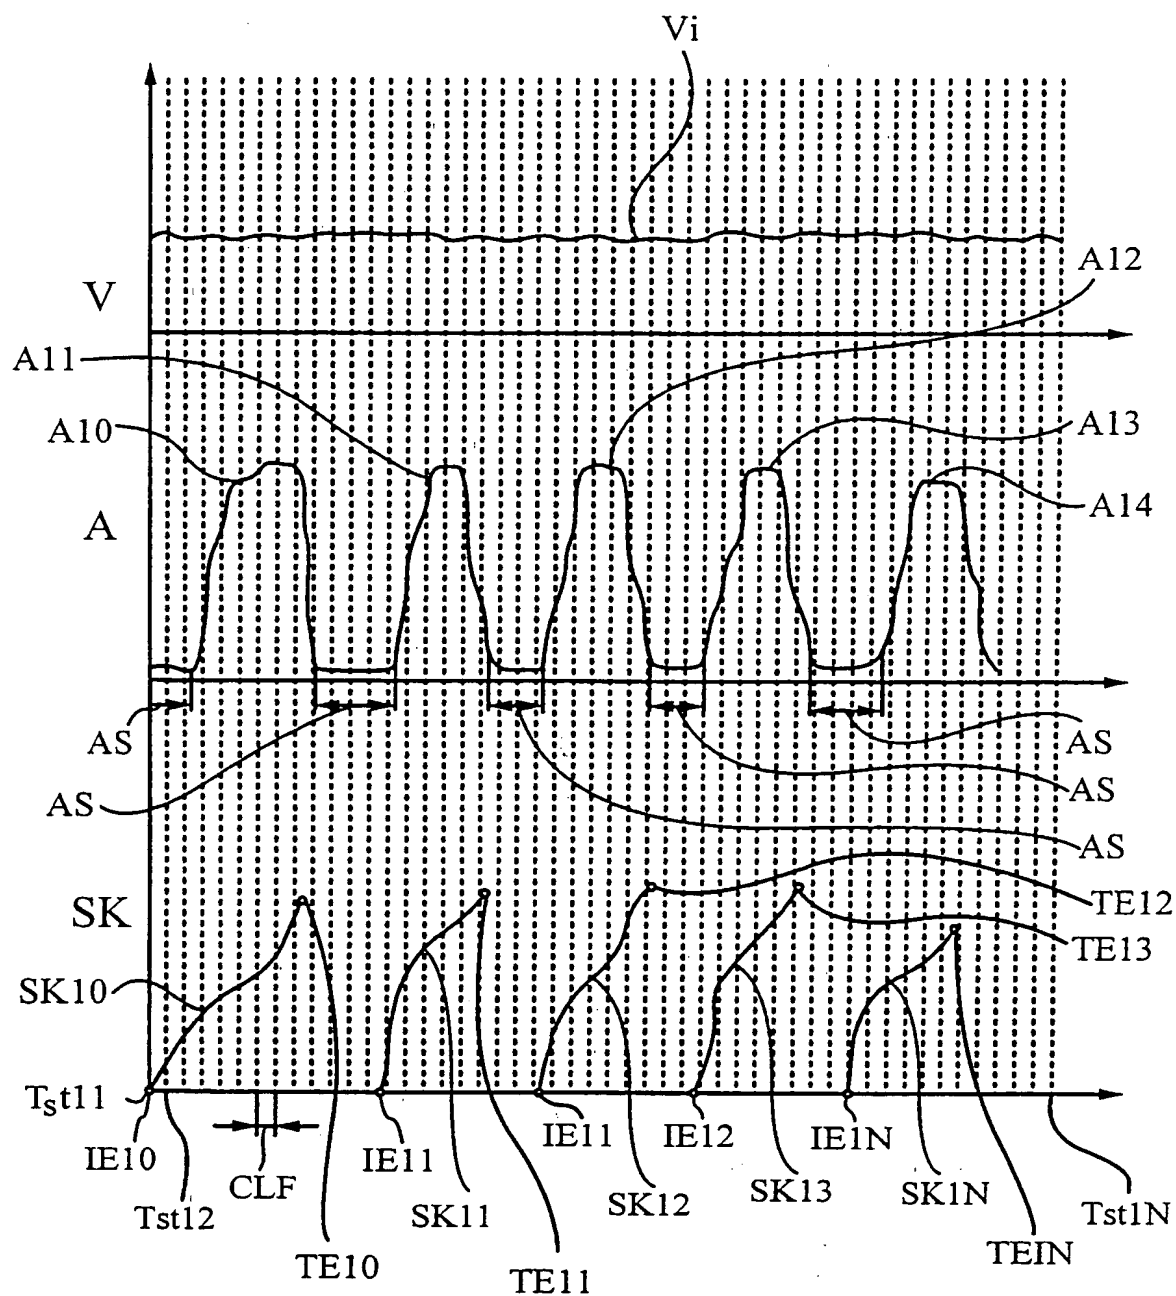


Fig. 3

3/5

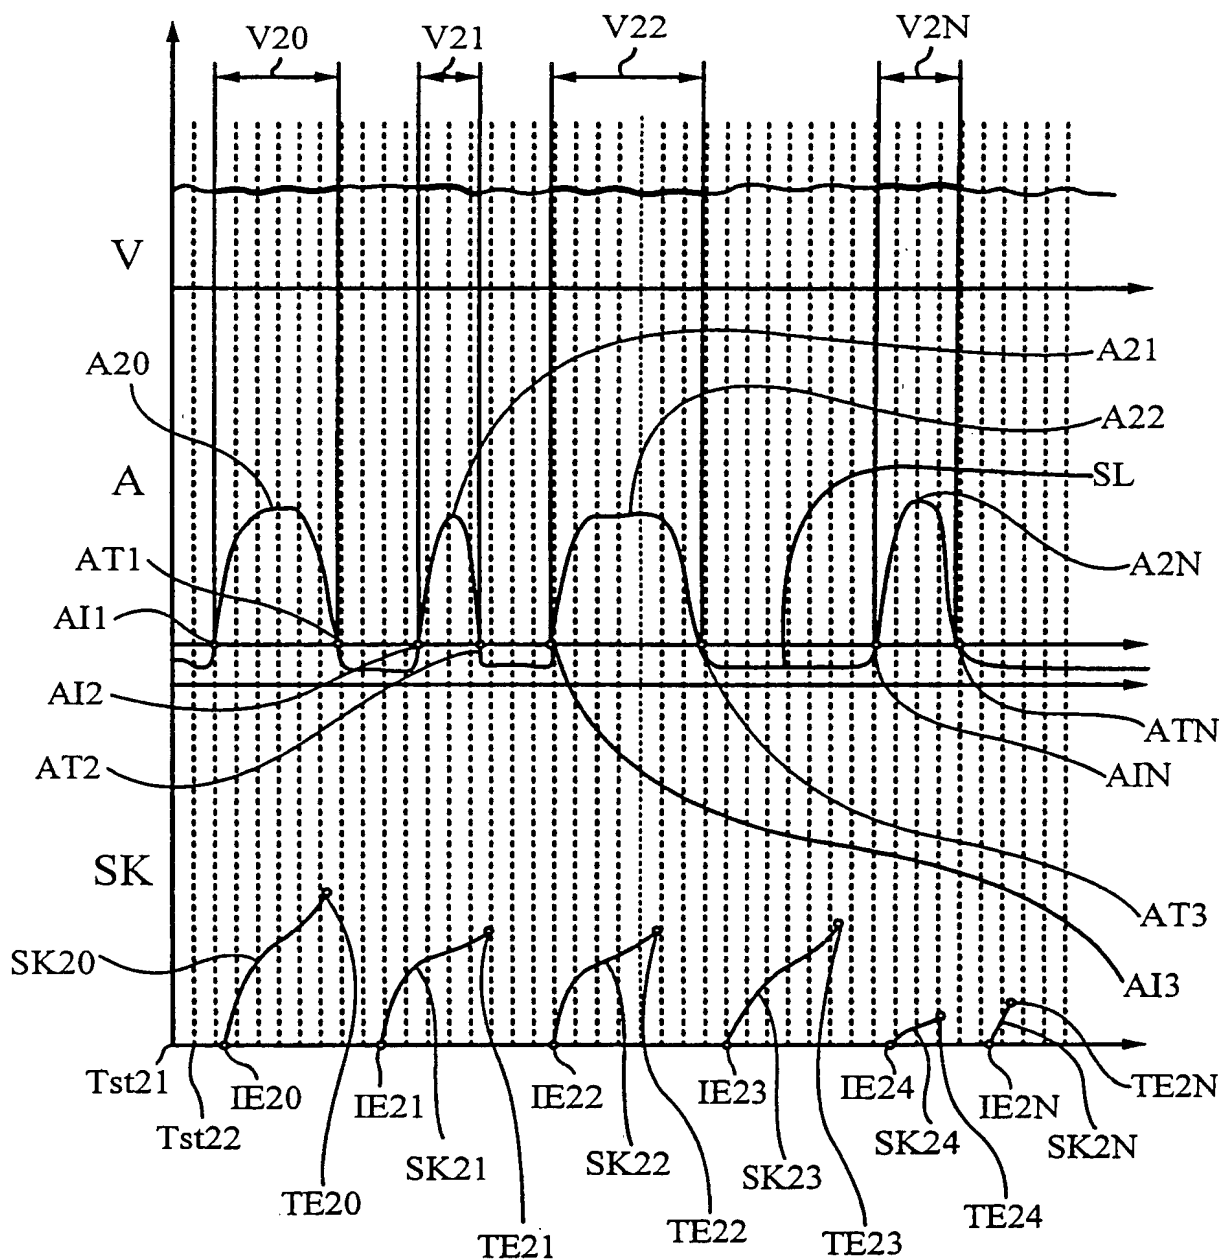


Fig. 4

BEST AVAILABLE COPY



4/5

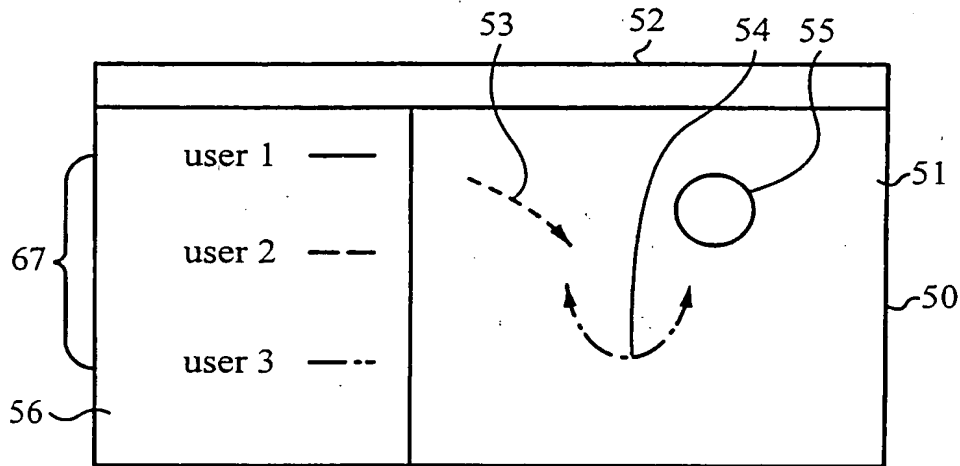


Fig. 5

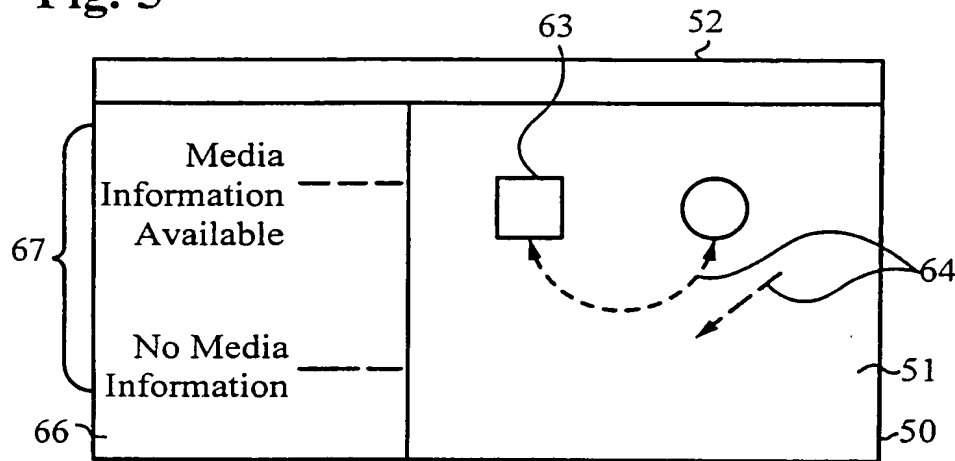


Fig. 6

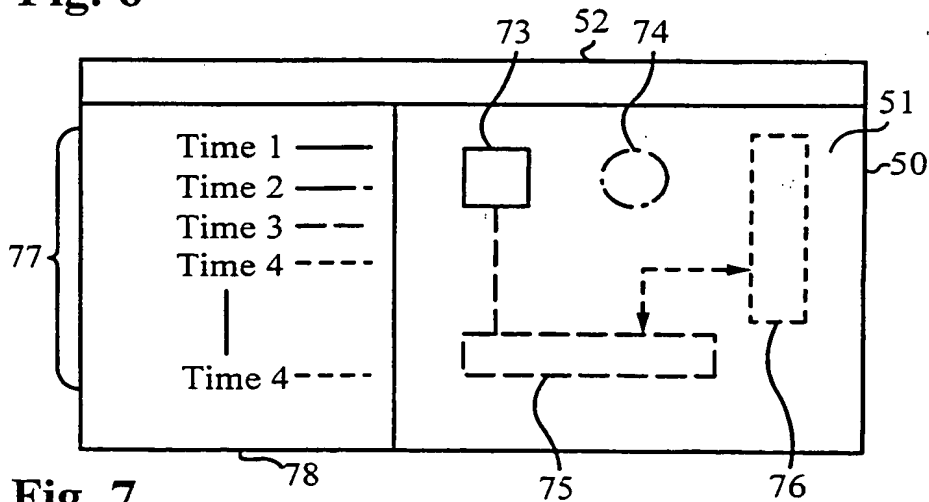


Fig. 7



59A



59B



59A



59B



59A



59B

5/5


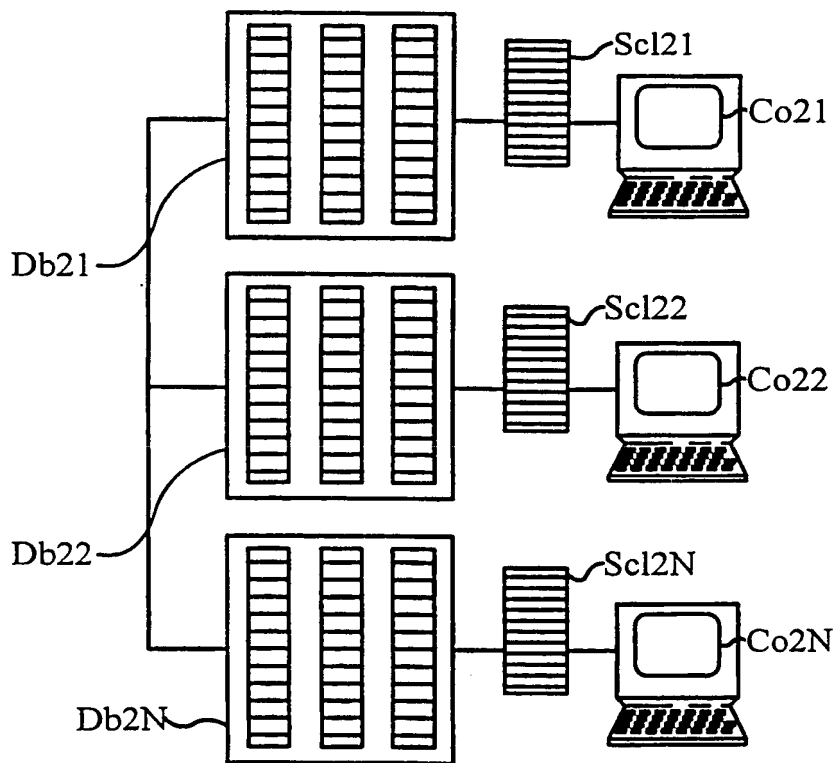


Fig. 9

BEST AVAILABLE COPY

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau

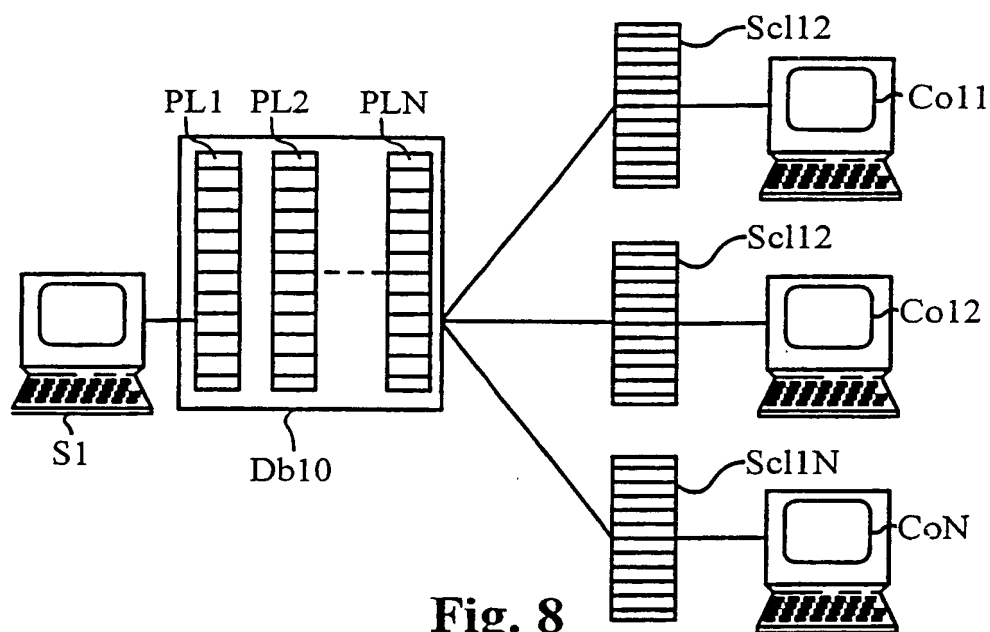

(43) International Publication Date  
16 November 2000 (16.11.2000)

PCT

(10) International Publication Number  
**WO 00/68759 A3**

(51) International Patent Classification<sup>7</sup>: **G06K 9/00**

**LEIFER, Larry**; 831 Esplanada Way, Stanford, CA 94305 (US).

(21) International Application Number: PCT/US00/12833

(22) International Filing Date: 9 May 2000 (09.05.2000)

(74) Agent: **ALBOSZTA, Marek**; 426 Lowell Avenue, Palo Alto, CA 94301 (US).

(25) Filing Language: English

(81) Designated States (*national*): AU, CA, JP.

(26) Publication Language: English

(84) Designated States (*regional*): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

(30) Priority Data:  
60/133,782 12 May 1999 (12.05.1999) US

Published:  
— With international search report.


(71) Applicant: **THE BOARD OF TRUSTEES OF THE LE-  
LAND STANFORD JUNIOR UNIVERSITY [US/US]**;  
Suite 350, 900 Welch Road, Palo Alto, CA 94304-1850  
(US).

(88) Date of publication of the international search report:  
22 February 2001

(72) Inventors: **YEN, Samuel**; 768 N. Rengstorff Avenue,  
Apt. 10, Mountain View, CA 94043 (US). **FRUCHTER,  
Renate**; 470 Los Pajaros, Los Altos, CA 94024 (US).

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: SYSTEM AND METHOD FOR INDEXING, ACCESSING AND RETRIEVING AUDIO/VIDEO WITH CONCUR-  
RENT SKETCH ACTIVITY

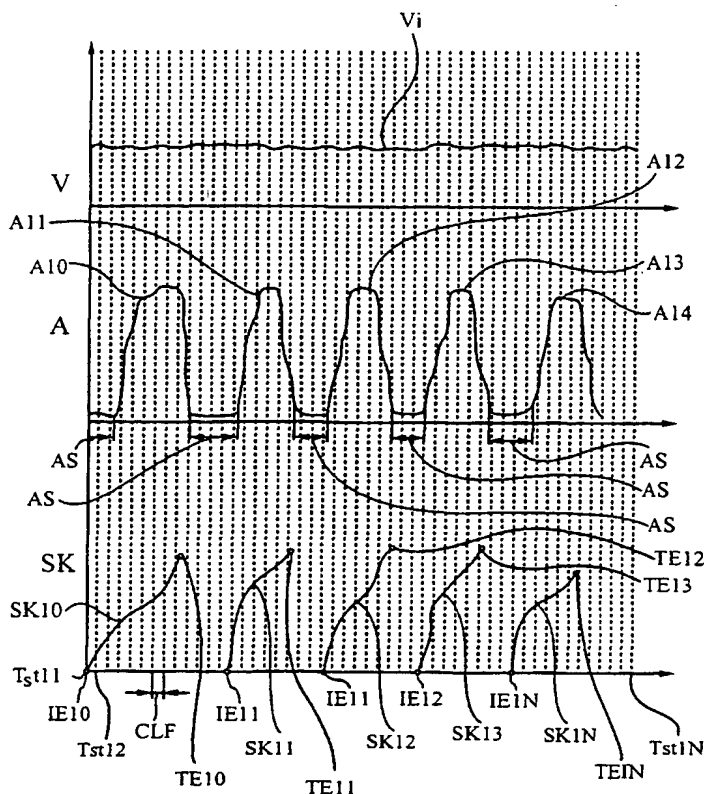

(57) Abstract: For a number of users is a system provided to creat, edit, replay and view documents of free hand drawn sketches. The system captures the creation process together with verbal and/or vi-  
sual information provided by each user and auto-  
matically correlates them for a later synchronized  
replay (Fig. 3). The system provides a numb er of  
to ols and features, mainly to: combine the sketch-  
ing activity with existing images (Fig. 6), to se-  
lectively retrieve media information correlated to  
individual sketch entities and to quasi simultane-  
ously collaborate at a common document. The sys-  
tem architecture can be adjusted to various param-  
eters in the communication infrastructure (Fig. 8).  
The system may be implemented in any software  
program, a web based service, a web browser, an  
operating system for computers and/or communi-  
cation devices (Fig. 9).

WO 00/68759 A3

BEST AVAILABLE COPY

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US00/12833

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : G06K 9/00

US CL : 382/113, 197, 199, 395/333, 345/302

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 382/113, 197, 199, 395/333, 345/302

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5,675,752 A (SCOTT et al) 07 OCTOBER 1997, Col. 2, lines 1-65.	1-27
Y,E	US 6,072,479 A (OGAWA) 06 JUNE 2000, Col. 2, lines 40-65.	1-27
Y	US 5,608,859 A (TAGUCHI) 04 MARCH 1997, Col. 2, lines 4-56.	1-27



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*A* document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*E* earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*G* document member of the same patent family
*O* document referring to an oral disclosure, use, exhibition or other means	
*P* document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

20 OCTOBER 2000

Date of mailing of the international search report

04 DEC 2000

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

Mahmood Choobin

Telephone No. (703) 306-5787